


axl.fs8.120w-10W



Features

- 5m roll - flexible 8mm - 120 white LED/m
- Colour Temperature Options: #2300K #2700K #3000K #4000K
- 10 Watts/metre
- 24Volts DC
- One roll of 8mm, single-row, 2216-size, white LEDs. Density is 120 LEDs per metre.
- 3 years warranty

Applications

- For indoor and integrated use. Outer jacket is heat-shrunk plastic for easy cleaning.
- Features 8mm width strip
- Suitable for general purpose applications

Physical

Dimension	
Strip width	8 mm
Cuttable length (min.)	5 cm
Printed circuit width	8 mm
Roll length	5 m
Material	
Strip base	Flexible printed circuit-board
Backing	Peel-off adhesive
Ingress rating	IP54




Connection	
Solder pads	2 [+] Positive [-] Negative (ground)
Component	
Light source/s	2216 White SMT LED
Source density	120 LED/m
Performance	
Voltage	24 V
Current	~417 mA
Power (per metre)	10 W/m


Optical

Output	
Lumens	? Lm/m
Beam angle	120 °
Colour	
Rendering	95+ CRI
Matching	<3 SDCM
Options	
XXWarm white	2300K
XWarm white	2700K
Warm white	3000K
Neutral white	4000K


Models

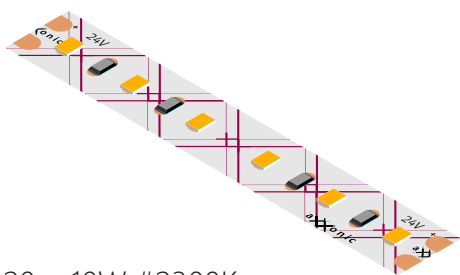


axl.fs8.120w-10W #2300K

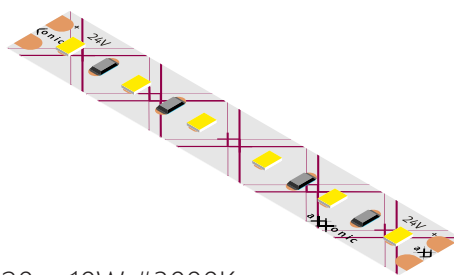


axl.fs8.120w-10W #3000K

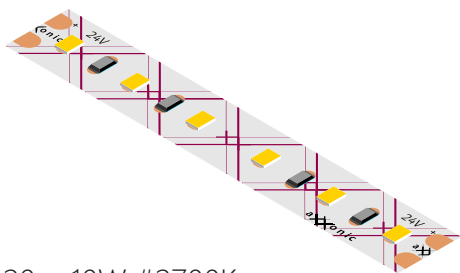

axl.fs8.120w-10W #2700K

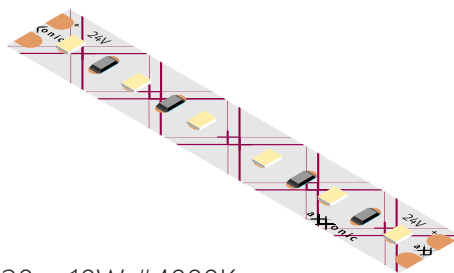

axl.fs8.120w-10W #4000K

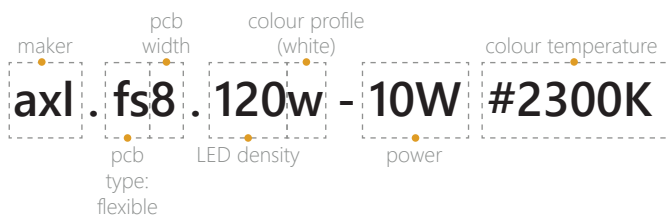

Attention:

1. Installation surface must be smooth, clean and dry.
2. The part of LED components cannot be fixed on the surface of the sharp edge.
3. Strip should not be collided or crushed.
4. Strip can be cut following the cutting lines.

Note: Please quote the full product code while placing the order, along with the required colour temperature option where specified.