

axl.rs26.tr252w.ic-30W



Features

- 1.2m stick - rigid 26mm - 252 white LEDs with IC regulation
- Colour Temperature Options: #2200K #2700K #3500K #4500K
- 30 Watts/stick
- 24Volts DC
- 1.2m of rigid aluminium strip, 26mm, triple-row, 4014-size white LEDs. Density is 252 LEDs per 1.2 metres.
- 3 years warranty

Applications

- For indoor and integrated use. Three mounting holes per 10cm segment.
- Features 26mm width strip with even light output. Cool operation at high-power. Options include warmer tone #2200K LED and unique #3500K and #4500K "in-between" commercial choices.
- Suitable for bars, restaurants, kitchen, offices, high-ceilings, workshop and commercial spaces. High-output and reliable.

Physical


Dimension	
Strip width	26 mm
Cuttable length (min.)	~9.9 cm
Printed circuit width	25.6 mm
Module length	1.188 m
Material	
Strip base	Aluminium printed circuit-board
Backing	Peel-off adhesive
Ingress rating	IP20



Connection	
Solder pads	2 [+] Positive [-] Negative (ground)
Component	
Light source/s	4014 White SMT LED
Source density	212 LED/m
Performance	
Voltage	24 V
Current	1050 mA
Power (10cm segment)	2.5 W
Power (per metre)	25 W/m
Power (1.2m length)	30 W


Optical

Output	
Lumens	2583 Lm/m
Beam angle	120 °
Colour	
Rendering	90+ CRI
Matching	<3 SDCM
Options	
XX2Warm white	2200K
XWarm white	2700K
Mild white	3500K
Neutral white	4500K

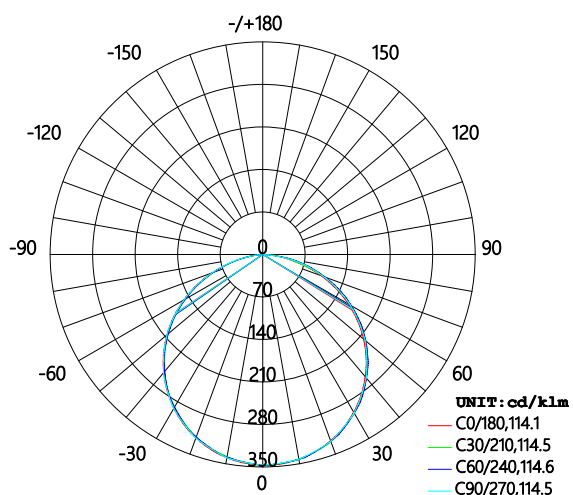


AVERAGE BEAM ANGLE(50%):114.4 DEG


Models

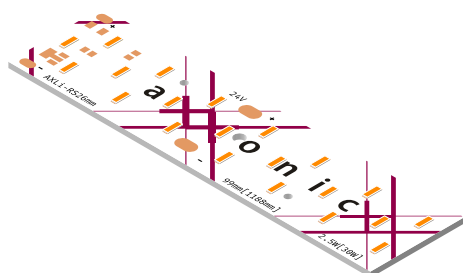


axl.rs26.tr252w.ic-30W #2200K

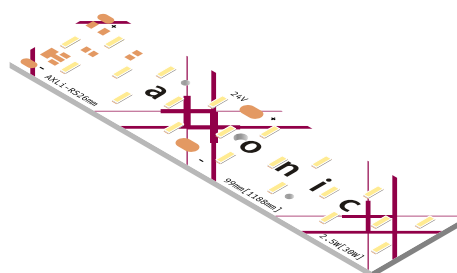


axl.rs26.tr252w.ic-30W #3500K

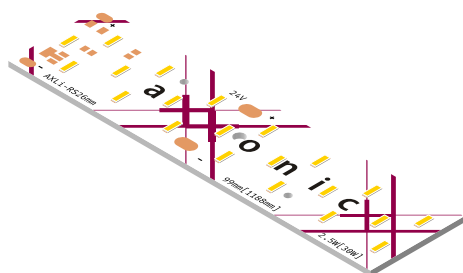

axl.rs26.tr252w.ic-30W #2700K

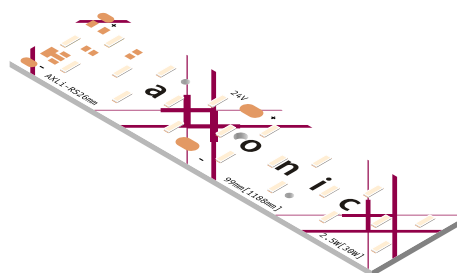

axl.rs26.tr252w.ic-30W #4500K

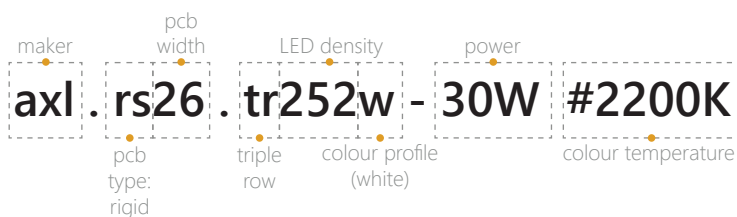

Attention:

1. Installation surface must be smooth, clean and dry.
2. The part of LED components cannot be fixed on the surface of the sharp edge.
3. Strip should not be collided or crushed.
4. Strip can be cut following the cutting lines.

Note: Please quote the full product code while placing the order, along with the required colour temperature option where specified.