


axl.fs14.240ww-14W



Features

- 5m roll - flexible 14mm - 240 white and white LED/m
- Colour Temperature Mixed: #1800K + #4000K
- 14 Watts/metre
- 24Volts DC
- One roll of 14mm, single-row, 2216-size, white LEDs. Density is 240 LEDs per metre. Two input channels control equal numbers of extra warm white and extra cool white LEDs.
- 3 years warranty

Applications

- For outdoor and rugged use. Water-resistant, two-layers filled silicone extrusion. 20 cuttable 5cm segments per metre.
- Features 14mm width strip which achieves a deep-range of warm light tones. Includes custom "hot white"#1800K LED
- Suitable for general lighting indoor and outdoor, mood lighting, trees and gardens, patio, workshops.

Physical

Dimension	
Strip width	14 mm
Cuttable length (min.)	5 cm
Printed circuit width	12 mm
Roll length	5 m
Material	
Strip base	Flexible printed circuit-board
Backing	Peel-off adhesive
Ingress rating	IP68




Connection	
Solder pads	3 [-] [-] [+]
Component	
Light source/s	2216 White SMT LED
Source density	240 LED/m
Performance	
Voltage	24 V
Current	~583 mA
Power (per metre)	14 W/m

Optical

Output	
Lumens	? Lm/m
Beam angle	120 °
Colour	
Rendering	95+ CRI
Matching	<3 SDCM
Options	
Hot white Neutral white	1800K + 4000K

Models

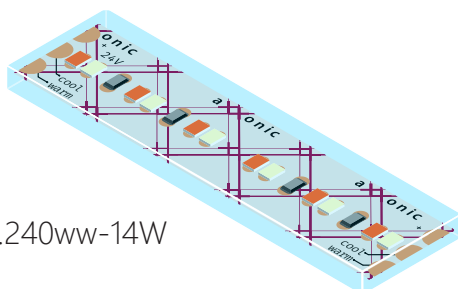

axl.fs14.240ww-14W



Attention:

1. Installation surface must be smooth, clean and dry.
2. The part of LED components cannot be fixed on the surface of the sharp edge.
3. Strip should not be collided or crushed.
4. Strip can be cut following the cutting lines.

Note: Please quote the full product code while placing the order, along with the required colour temperature option where specified.